



1. Designed for long haul Gigabit Ethernet 1000 Base-T, full duplex applications.
2. Supports four pairs of category 5 UTP cable.
3. Cable interface for isolation and low common mode emissions
4. Compliant with IEEE 802.3ab standard for 1000 Base-Tesigned to support 1:1 Turns Ratio Transceivers.
5. Operating Temperature range: -40°C TO +85°C
6. storage temperature range: -40°C TO +125°C

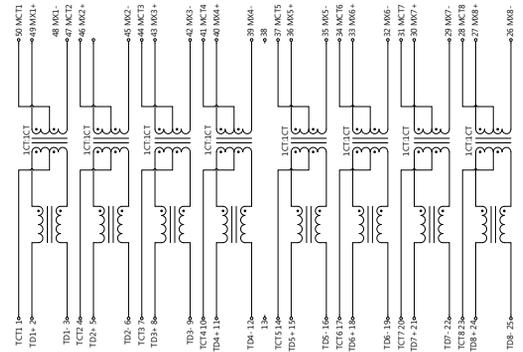

### DIMENSIONS & SCHEMATICS

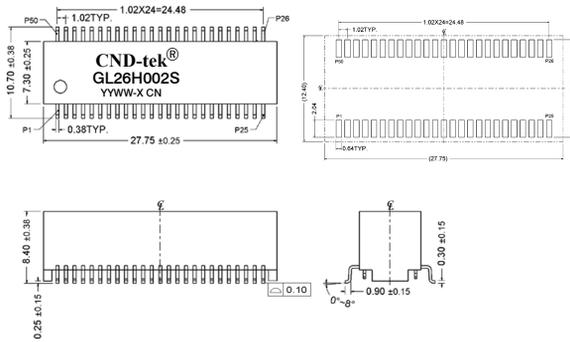


**Note:** 1. Dimension: mm, 2. Unless otherwise specified, tolerances are: ± 0.15mm

### TECHNICAL SPECIFICATIONS

OCL :	350 $\mu$ H Min. @ 100 KHz, 0.1V with 8mA DC Bias
Leakage	0.5 $\mu$ H Max. @ 100KHz, 0.1V
Inductance: Cw/w:	28pF Max. @ 100KHz, 0.1V
DCR:	1.20 $\Omega$ Max.
Turns Ratio(±5%):	1CT:1CT(TX), 1CT:1CT(RX)
Insertion Loss:	-1.0 dB Max. @ 1-100MHz
Return Loss:	-18dB Min. @ 1-30MHz -14 dB Min. @ 30-60MHz -12 dB Min. @ 60-80MHz -10 dB Min. @ 80-100MHz
Cross Talk:	-40 dB Min. @ 1-30 MHz -35dB Min. @ 30-60 MHz -30 dB Min. @ 60-100 MHz
Common Mode Rejection :	-40dB Min. @ 1-30 MHz -35dB Min. @ 30-60 MHz -30dB Min. @ 60-100 MHz
Isolation HI-POT:	1500Vms 1mA 1Second

### PACKING SPECIFICATION

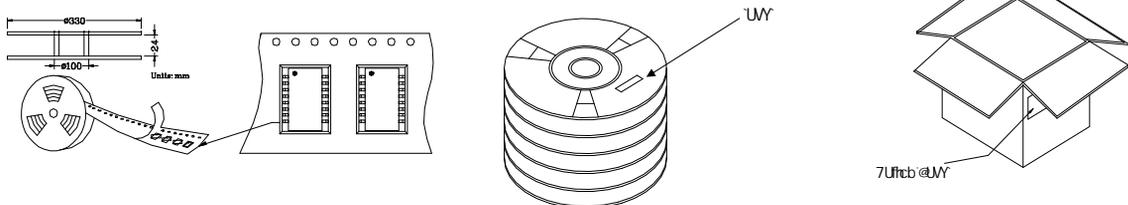

1. units/reel:450PCS
2. reel/carton:4PCS
3. units/carton :1800PCS

EXPORT CARTON:367(L)x337(W)x235(H)